

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

**(10) International Publication Number**  
**WO 02/095818 A1**

- (51) **International Patent Classification<sup>7</sup>:** H01L 21/762

(21) **International Application Number:** PCT/US02/16004

(22) **International Filing Date:** 17 May 2002 (17.05.2002)

(25) **Filing Language:** English

(26) **Publication Language:** English

(30) **Priority Data:**  
09/863,980 23 May 2001 (23.05.2001) US

(71) **Applicant:** INTERNATIONAL BUSINESS MACHINES CORPORATION [US/US]; New Orchard Road, Armonk, NY 10504 (US).

(72) **Inventors:** BEYER, Klaus, D.; 14 Kingwood Lane, Poughkeepsie, NY 12601 (US). JAMIN, Fen, F.; 17C Scarborough Lane, Wappingers Falls, NY 12590 (US). VAREKAMP, Patrick, R.; Apt. 1, 21 Scenic Drive, Croton-on-Hudson, NY 10520 (US).

(74) **Agent:** PEPPER, Margaret, A.; International Business Machines Corporation, Dept. 18G, Bldg. 300/482, 2070 Route 52, Hopewell Junction, NY 12533 (US).

(81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments


*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(54) Title: OXYNITRIDE SHALLOW TRENCH ISOLATION AND METHOD OF FORMATION**

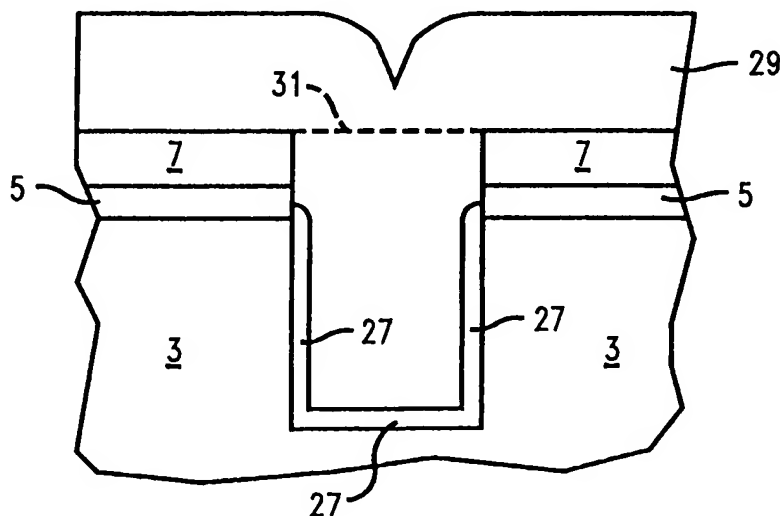

**(57) Abstract:** An oxynitride material is used to form shallow trench isolation regions in an integrated circuit structure. The oxynitride may be used for both the trench liner (27) and trench fill material (29). The oxynitride liner (27) is formed by nitriding an initially formed oxide trench liner. The oxynitride trench fill material (29) is formed by directly depositing a high density plasma (HDP) oxide mixture of  $\text{SiH}_4$  and  $\text{O}_2$  and adding a controlled amount of  $\text{NH}_3$  to the plasma mixture. The resultant oxynitride structure is much more resistant to trench fill erosion by wet etch, for example, yet results in minimal stress to the surrounding silicon. To further reduce stress, the nitrogen concentration may

be varied by varying the proportion of  $O_2$  to  $NH_3$  in the plasma mixture so that the nitrogen concentration is maximum at the top of the fill material.

**WO 02/095818 A1**

## OXYNITRIDE SHALLOW TRENCH ISOLATION AND METHOD OF FORMATION

Technical Field

The present invention generally relates to semiconductor devices and, more particularly, to semiconductor device shallow trench isolation (STI) structures and methods of forming such structures using oxynitride as the trench fill material to inhibit STI etch erosion during fabrication.

Background and Related Art

As the critical dimension (CD) of the polysilicon gate of field effect transistors (FETs) is made smaller in order to increase the performance of the FET, greater control of the gate CD is required. The variation in the gate CDs across the entire chip, known as across-chip-linewidth-variation (ACLV), is a determining factor in the overall circuit speed.

The typical method for patterning the polysilicon gate in ultra large scale integrated (ULSI) circuits is to use photolithography with small wavelength light (248nm or smaller). In order to control the photolithography process, an anti-reflective coating is typically spun onto the blanket polysilicon film before the photoresist is spun on. The thickness of the anti-reflective coating is optimized such that a minimum amount of light is reflected from the substrate wafer. If the anti-reflective coating thickness varies across the chip, then the amount of reflected light will vary, which results in a lack of control of the photolithography process. This lack of control results in a larger ACLV and reduced circuit performance.

One of the key contributors to anti-reflective coating thickness variation across the chip is the height of the shallow trench isolation (STI) material relative to the silicon active area where the devices are located. After the gate-level mask and photolithography tools are optimized and the polysilicon etch process is optimized, STI height variation will be one of the remaining contributors to increased ACLV.

In typical semiconductor device manufacturing processes, the STI region is composed of a pure oxide material, such as high density plasma (HDP) oxide or plasma tetraethyl orthosilicate (TEOS). Since the STI trench formation and STI fill processes are performed at the beginning of the chip manufacturing process, the STI oxide encounters many subsequent wet

etch processing steps (e.g. with dilute HF or buffered HF) as well as dry etching steps (e.g. reactive ion etching (RIE)). Thus, as a normal part of the fabrication process leading to the final device, the STI oxide will be etched away. This leads to a change in the height of the STI oxide compared to the silicon active area each of which exhibit height changes as the silicon wafer proceeds through the chip manufacturing process.

Since there are many etch steps between STI formation and polysilicon deposition, and each etching step has its associated variabilities, there is often a lack of control over the amount of etching the STI actually undergoes. In wet chemical baths, for example, the HF concentration is known to change over the life of the bath. Also, depending of the application technique used to administer the HF, there may also be within-wafer variations of the etching rate. Similarly, RIE tools, which typically process one wafer at a time, have well-known across wafer variations and wafer-to-wafer variations.

One way to reduce the erosion of the STI region is simply to eliminate as many wet and dry etch steps as possible between STI formation and deposition. For example, elimination of the sacrificial oxidation and oxide strip steps used to condition the active area surface provides some simplification. However, this approach can only be taken so far, as some of these steps may be necessary to create the final circuit and achieve necessary yield. Another way to reduce STI erosion is to reduce the amount of exposure to chemical etchants in each of the required etch steps. Likewise this approach is problematic, since the etchant steps are often made intentionally long to remove particulates, remedy inconsistent oxide thicknesses or create hydrogen-terminated surfaces for subsequent processes.

Other efforts have been made to form caps over the STI material in order to inhibit STI erosion during subsequent etching steps used to form the active areas. For example, U.S. Patent 6,146,970 to Witek, et al. describes the use of a silicon nitride or nitrogen-rich silicon oxynitride layer for capping an oxide STI material such as TEOS. However, the Witek, et al. bilayer approach adds significant cost and process complexity to the formation of STI. For example, Witek, et al. use two separate liner processes, two separate deposition processes and two separate CMP processes.

In this regard, acceptable solutions to the erosion of STI must be simple and cost-effective. In addition to exhibiting simplicity and low cost, acceptable solutions should

have sufficient robustness such that it is unnecessary to constrain other process variables simply to control STI height. At the same time, such solutions must preferably fit within existing processes so as to avoid affecting product yield and cost.

#### Disclosure of Invention

5           Accordingly, it is an object of the present invention to provide improved semiconductor device structures and methods for making same.

It is a further object of the present invention to provide improved STI for semiconductor devices, such as, FETs.

10           It is yet a further object of the present invention to provide improved STI structures for USLI semiconductor devices and methods for making such structures.

It is still yet a further object of the present invention to provide an improved STI structure and a simple process for fabricating same, which structure and process provide improved fabrication control and, thus, improved device performance.

15           It is another object of the present invention to provide improved STI structures and methods of making same so as to control STI erosion and the height of the STI material relative to the semiconductor active area.

20           In accordance with the present invention, the STI between the active areas of semiconductor devices is formed of various structural arrangements of oxynitride. The oxynitride may be used for both the trench liner and trench fill material. Introducing nitrogen into both the oxide liner and plasma oxide fill material permits convenient utilization of existing processes. The oxynitride STI is formed in a manner to minimize stress to the surrounding silicon, and yet acts to provide an STI structure that resists etch attack and erosion during the required fabrication steps subsequent to the STI deposition.

25           Since the use of oxynitrides for STI results in minimal trench fill erosion, such use allows close control of STI height relative to the silicon active area across the wafer, and from wafer-to-wafer. Initially, a trench oxide liner may be nitrided by annealing, for example, in a nitrogen ambient to form an oxynitride liner. Then, the oxynitride STI fill material may be deposited directly into the trench during formation of the trench plug by the addition of nitrogen

into the STI SiO<sub>2</sub> plasma trench fill process. The nitrogen concentration may be varied dynamically during the trench fill process so as to tailor it to the overall process. Varying the nitrogen concentration so that the highest concentration exists toward the surface of the plug minimizes both plug erosion and stress to the surrounding silicon under the active area regions.

- 5        These foregoing and other objects, features and advantages of the invention will be apparent from the following more particular description of a preferred embodiment of the invention, as illustrated in the accompanying drawings, wherein like reference members represent like parts of the invention.

#### Brief Description of the Drawings

- 10        Figure 1 - 4 illustrate, in cross-sectional diagrams, the STI fabrication steps and resulting problem of trench fill erosion, as known in the prior art.

Figures 5 - 8 illustrate, in cross-sectional diagrams, the fabrication steps and resulting structure to overcome trench fill erosion, in accordance with the present invention.

- 15        Best Mode for Carrying Out the Invention

- Figure 1 illustrates a conventional semiconductor trench structure 1, as known in the prior art. In Figure 1, a semiconductor substrate or semiconductor wafer 3 is provided. A pad oxide or thermal oxide layer 5 is formed over substrate 3. A thicker silicon nitride layer 7 is typically deposited on top of the thin oxide layer 5 to function as a hard mask. Then, the nitride layer is covered with photoresist 9. Conventional photolithographic processing is then used to etch an opening 11 through the silicon nitride layer 7 and the oxide layer 5 to expose a top surface portion of substrate 3. This opening in the dielectric layers 5 and 7 is then extended into the substrate by one or more RIE silicon etch steps to form STI region 11, as shown in Figure 1. After formation of STI region 11, photoresist 9 is removed and a thermal oxidation process is utilized to form a thin oxide liner layer 13 on both the sidewalls and bottom surface of STI region 11, as shown in Figure 1.
- 20
- 25

Figure 2 illustrates conventional STI fill and polishing processes. The silicon dioxide STI fill material 15 is next conformally deposited over the substrate, filling trench 11. The substrate is then typically polished using a technique, such as chemical-mechanical polishing (CMP), to remove the excess STI fill material located above nitride layer 7. The surface of the substrate is now flat and, thus, the STI fill material is planar with the surface of nitride layer 7, as indicated by broken line 17.

Figure 3 illustrates the results of a conventional STI recess process. To implement this, the STI  $\text{SiO}_2$  fill material is intentionally etched with a wet HF process or a dry RIE process in order to recess the oxide from the level of line 17, planar with the nitride, to level 19 below the nitride. The intended purpose of this is to set the initial height of the STI material such that, after the subsequent manufacturing processing steps, the STI material will be, on average, planar with substrate 3 at the time of polysilicon deposition. After the STI level is recessed, nitride layer 7 is removed, typically with a hot phosphoric wet etch. This results in substrate 3 being covered with oxide layer 5 and the STI oxide fill material forming an STI oxide plug 15a raised above the surface of oxide layer 5 to a level corresponding to line 19. The STI material 15 may then be annealed in an inert or oxidizing ambient with a furnace or rapid thermal process resulting in a densified plug 15a. This, however, may be done at any point after deposition of the STI material or nitride removal.

Figure 4 illustrates the STI area at the time of deposition of polysilicon layer 21. Many processing steps occur between removal of nitride layer 7 and deposition of polysilicon layer 21 used for the FET gate. Since some of these processing steps involve dry and/or wet etching, the height of the STI oxide plug material is now at a level indicated by line 23. Since some of the processing steps involve thermal oxidations and/or  $\text{SiO}_2$  depositions, the oxide layer 5 on top of substrate 3 is now a different oxide layer 25. Ideally, STI plug level 23 is planar with the surface of oxide layer 25 at the time polysilicon layer 21 is deposited. However, in practice this is quite difficult to achieve.

It should be understood that elements illustrated in the drawings are not necessarily drawn to scale but are merely provided to facilitate an understanding of the description. For example, the dimensions of some of the elements may be exaggerated relative to other elements.

A detailed description of the features and advantages of the present invention will now

be described with reference to Figures 5 - 8. The description and cross-sectional diagrams will demonstrate the similarities and points of departure between the STI structure and method of making such structure, in accordance with the present invention, and that used in the prior art. In overcoming the problem of trench fill erosion in STI material, it is advantageous, from both a cost and reliability standpoint, to use as many of the extant processing steps as possible.

With reference to Figure 5, there is shown a cross-sectional view of a conventional semiconductor trench structure, similar to that shown in Figure 1 but with photoresist layer 9 omitted. The same reference characters are used in Figures 5 - 8 for those structural features which are the same as those shown in Figures 1 - 4. It should be understood that semiconductor substrate 3 may be any of a variety of substrates, such as, silicon, silicon-on-insulator, silicon germanium, etc.

Accordingly, Figure 5 shows a substrate 3 covered with pad oxide layer 5 and silicon nitride layer 7 all of which material has a trench 11 formed therein. The process of forming an oxynitride STI structure, in accordance with the present invention, may begin with nitriding the trench oxide liner, which was identified as oxide liner 13 in Figures 1 - 4 and now is identified as oxynitride liner 27 in Figure 5 - 8. This is done before any STI fill material is deposited in the trench. One advantage of nitriding the liner at this point in the process is that should the upper corners of trench 11 be exposed after STI formation but before polysilicon deposition, there is provided added protection of the corners from chemical etch attack. This will result in a smaller "divot" at the semiconductor-STI interface due to chemical etching.

Since the oxide liner has a typical thickness of  $30\text{\AA}$  -  $500\text{\AA}$ , one effective way of forming oxynitride liner 27 is by annealing the oxide liner in an N-containing ambient. Thus, trench 11 with its initial oxide liner, as shown in Figure 5, may be exposed to any one of  $\text{N}_2\text{O}$ ,  $\text{NO}$ ,  $\text{NH}_3$  or  $\text{N}_2\text{H}_4$ , for example, at typical temperatures of between  $500^\circ\text{C}$  and  $1100^\circ\text{C}$  and pressures of between 1mtorr and 10 atm. The choice of gas controls the amount of nitrogen incorporated into the liner, as well as the location of the nitrogen. For example,  $\text{N}_2\text{O}$ ,  $\text{NO}$  and  $\text{NH}_3$  will diffuse through the oxide layer and incorporate nitrogen at the silicon- $\text{SiO}_2$  interface, while  $\text{NH}_3$  and  $\text{N}_2\text{H}_4$  can also incorporate nitrogen at the  $\text{SiO}_2$ -atmosphere interface. In this regard  $\text{N}_2\text{O}$  can only incorporate  $<1\%$  nitrogen concentration ( $[\text{N}]$ ) into the oxide, while  $\text{NO}$ ,  $\text{NH}_3$  and  $\text{NH}_4$  can incorporate anywhere between 1% and 20%  $[\text{N}]$ , depending upon the anneal temperature,

pressure and time duration. The duration of gaseous exposure is optimized for the annealing tool design, as well as the desired raw process time.

Another way to convert the oxide liner into oxynitride liner 27 is with a plasma nitridation (PN) process. Such processes are usually characterized as either remote or direct. In remote plasma nitridation, the plasma is generated in an attached but separate chamber and then the excited species are convected into the chamber holding the wafer using an inert carrier gas. In direct plasma nitridation, the plasma is formed in the same chamber as the wafer in a background of an inert gas. Remote plasma nitridation has the advantage that less damage will be done to the wafer, since the energetic plasma species are confined to a separate chamber. However, direct plasma nitridation offers better control over the across-wafer [N], since the plasma can be designed to be uniform over the entire surface of the wafer. Both processes may incorporate between 1% and 20% [N], and in both cases the [N] tends to be located at the oxide-atmosphere surface since the excited nitrogen species tend to react before completely diffusing through the oxide layer. In both cases, the wafer temperature is typically held at a value between 20°C and 800°C during plasma processing, the chamber pressure is typically between 10mtorr and 700 torr, and the source of nitrogen is typically molecular ( $N_2$ ) or ammonia ( $NH_3$ ).

One aspect common to each of the nitridation schemes discussed above is that the oxide liner will receive the same nitrogen-depth profile in the sidewall of the trench as in the bottom of the trench. In some cases it may be desirable to maximize [N] in oxynitride liner 27 at the top region of the sidewalls of trench 11 so that divot formation due to etch removal is further minimized while at the same time avoiding the additional stress at the bottom of the trench that would otherwise occur if it underwent the incremental [N] increase introduced at the top. The best way to accomplish this feature is to incorporate the additional nitrogen at the top region of oxynitride liner 27 via direct ion implantation with molecular or atomic nitrogen at a significant angle away from normal to the wafer surface. Typical implant angles may vary between 10 degrees and 45 degrees away from the normal. The angled ion implant may be performed in four separate steps by rotating the wafer 90 degrees between each implant. This results in a more even coverage of the nitrogen species and incorporated N into all sides of differently-oriented trench designs. Typical, atomic nitrogen doses vary between  $1e13$



atoms/cm<sup>2</sup> and 5e15 atoms/cm<sup>2</sup>, and result in a [N] of 1% to 20%. The ion implant energy must be tuned such that the majority of the implanted profile lies within the thin oxide (now oxynitride) liner. For an oxide layer between 30Å and 500Å, typical implant energies are 500 eV to 50 keV.

5           It is clear that the degree to which the ion implanted nitrogen extends from the substrate surface into the trench to implant liner 27 sidewalls is determined by ion implant angles, atomic nitrogen doses and implant energies. In this regard, it is preferred that this implant, and thus the increased [N], extend up to 500Å of sidewall below the surface of substrate 3. As is understood by those skilled in the art, the ion implant angle, atomic nitrogen dose and implant energy may  
10 readily be selected to implant nitrogen in up to 500Å of liner 27 sidewalls directly below the surface of the substrate, in addition to giving the desired increased [N].

          It should be pointed out that regardless of how the nitrogen is incorporated into the oxide liner in Figure 5, a further advantage of incorporation of nitrogen at this stage is that the device active areas are protected by nitride layer 7. Accordingly, there is little danger of impacting the  
15 yield or device properties of FETs, for example, formed on these surfaces, even while improving STI process.

          After conversion of the oxide liner to oxynitride 27, the overall processes described above in regard to Figures 2 - 4 may be employed with appropriate modification. Although, a pure oxide STI fill plug may be formed inside of oxynitride liner 27 at this point, as noted  
20 above, this would not fully solve the STI erosion problem since a pure oxide plug would be easily eroded by subsequent wet or dry etch processes, leaving oxynitride liner 27 remaining.

          Accordingly, it is a feature of the present invention to overcome this erosion problem by forming an STI structure of oxynitride fill material and, further, to deposit this oxynitride STI fill material directly into the trench. Figure 6 illustrates that at the time of conventional STI trench  
25 fill material deposition, with appropriate additions, an oxynitride STI material could readily be deposited, instead of the normal oxide STI material. This is most effectively achieved by altering the oxide STI material deposition process. The typical STI material deposited at this point is a high density plasma (HDP) oxide created by a plasma mixture of SiH<sub>4</sub> and O<sub>2</sub>. By adding a controlled amount of NH<sub>3</sub>, for example, to the plasma mixture, an HDP oxynitride  
30 trench fill layer 29 with uniform [N] may readily be deposited, as shown in Figure 6.

It should be noted that the proportion of  $O_2$  to  $NH_3$  in the plasma mixture may be varied dynamically during the deposition process in order to create STI fill material 29 with a varied or graded [N]. Typical gas flow ratios of  $NH_3$  to  $O_2$  may range between 0.1 and 10, whether the ratio is held constant during the process or varied dynamically. This range of flow ratios results in an oxynitride with a [N] between 3% and 25%. One advantage of varying or grading the [N] of the STI oxynitride fill material is to optimize the [N] benefits in the STI fill material while at the same time minimizing the stress created by the interaction of the fill material with substrate 3. In this regard, it is known that stoichiometric silicon nitride is not a good STI fill material since it creates large amounts of stress on the active area regions. Accordingly, to lessen any such effect here, to the degree it might exist, one may start the HDP deposition process with a low  $NH_3$  to  $O_2$  ratio, and then increase the ratio as the deposition progresses. Note that since trench depths are typically quite large (1000Å to 6000Å), other nitridation processes described herein would not be able to readily incorporate the high [N] in the STI fill material with the same degree of control as an oxynitride HDP deposition process.

After deposition of oxynitride STI fill material 29 in Figure 6, the fill material is subjected to a CMP process, for example, so as to produce a flat surface whereby the STI level 31, shown in Figure 6, would be planar with the surface of the nitride layer 7, as shown in Figure 7. This forms an oxynitride plug 29a. The typical CMP frictional endpoint technique employed in the prior art would work well even with an oxynitride fill material, since stoichiometric silicon nitride still offers much more friction to the CMP pad than an oxynitride with 25% [N].

The next step in the oxynitride STI formation is to recess the STI height from the final CMP level 31 to the desired level 33, as shown in Figure 7. A wet etch containing HF-EG (ethylene glycol) may be employed for this purpose. In this regard, ethylene glycol is known to etch oxides and nitrides at comparable rates, and the relative etch rate of oxide to nitride can be adjusted with bath temperature. Accordingly, although this form of recess process attacks nitride layer 7 as well as the oxynitride, since the purpose of nitride layer as a CMP stop has already been accomplished, its thickness is no longer important.

In any event, the oxynitride STI level 33 will be above the planar level of the substrate, since the final objective is to have the STI material planar with the substrate at the time of polysilicon deposition. Therefore, there will always be some nitride layer 7 material remaining

after the ethylene glycol process.

It should be noted that the amount of desired recess between levels 31 and 33 in Figure 7 will depend upon the [N] of the STI material. If the [N] is low, then the STI will still be eroded to some degree by subsequent wet and dry etch processes, and thus the amount of recess  
5 required will be relatively small. In the more typical and preferred approaches however, the [N] of the STI oxynitride material, especially at the top of the plug, would be high (close to 25% [N]) such that subsequent wet and dry etches would not significantly affect the height of the oxynitride STI. In these later approaches, it is clear that level 33 would be nearly planar with the surface of substrate 3. Accordingly, where [N] is high, there is only one etch process (the  
10 ethylene glycol recess process) that need be controlled within wafer, wafer-to-wafer and lot-to-lot, rather than several wet and dry etch processes.

To ensure a high [N] concentration at the top surface of oxynitride STI plug 29a, an additional plasma nitridation process may be employed after the recess process is complete. This nitridation process would typically have process parameters similar to those described  
15 above with respect to the description relative to Figure 5.

Thus, by using the above-described parameters with respect to either the remote plasma nitridation or the direct plasma nitridation processes, an excited nitrogen species would be incorporated at the very top surface (within the top 50Å) of the oxynitride STI plug 29a, as shown in Figure 7. In addition, the plasma nitridation process may be complemented with a  
20 shallow nitrogen ion implant in order to place some additional amount of nitrogen species below the layer of nitrogen previously incorporated at the surface of the oxynitride STI plug 29a by either remote or direct plasma nitridation. This additional amount of nitrogen species further protects the oxynitride STI plug 29a from chemical attack from the side, should STI plug 29a be exposed some incremental amount above the substrate surface. For example, with nitride layer 7  
25 etched away, sidewall portion 39 of plug 29a would be exposed to erosion.

It is clear that the depth of the shallow ion implant must be at least coextensive with the incremental amount of exposed plug above the substrate surface in order to ensure the most complete protection. The above nitridation processes should preferably be carried out while there is some residual nitride from nitride layer 7 remaining over the active areas. Such residual  
30 nitride would act to protect the active area from damage or material change which may affect the

threshold voltage  $V_t$  of the final devices.

It is also clear that the overall amount of [N] in the oxynitride deposited in the trench will depend, to some extent, upon the type of circuit and device design employed in the active area. In this regard, some circuit and device designs are very sensitive to stress effects on the semiconductor material around the STI. Accordingly, such designs may necessitate employing an oxynitride with a [N] of 10% or less. Even at this [N] level, however, the oxynitride exhibits a lower erosion rate than  $\text{SiO}_2$ . In addition, the [N] can be varied or graded, as hereinabove described, so that the top of the oxynitride plug exhibits the highest [N] which minimizes the amount of stress on the surrounding silicon while maximizing the ability to resist erosion at the top of the plug.

Where it is necessary, because of design considerations, to use an oxynitride STI plug with less than 10% [N], a higher [N] cap at the top surface of the oxynitride STI plug 29a may be formed. This may be done using a light plasma nitridation process. Since this process only incorporates nitrogen at the top surface of its target, oxide layer 5 is sufficiently thick to still protect the active area regions from the nitrogen. However, since STI oxynitride plug 29a extends above the substrate surface, the plug sidewall portion 39 above the substrate surface is then exposed to chemical wet etch attack, for example.

To protect the plug sidewall portion 39 from attack, additional steps may be employed to ion implant nitrogen into the sidewalls of the STI plug. This may be undertaken by applying resist layer 35 over oxide layer 5, as shown in Figure 8. Then, as described above with respect to Figure 5, nitrogen may be incorporated into the sidewalls of STI plug 29a by a direct ion implant with molecular or atomic nitrogen at significant angles away from normal to the substrate surface. Typical angles for such implant may vary between  $10^\circ$  and  $45^\circ$  from the normal. Again, the angled nitrogen is typically performed in four separate steps by rotating the wafer  $90^\circ$  between each implant. Typical atomic nitrogen may vary between  $1 \times 10^{13}$  atoms/cm<sup>2</sup> and  $5 \times 10^{15}$  atoms/cm<sup>2</sup>, and result in a [N] of between 1% and 20%. Typical implant energies would be between 500eV and 50keV.

After implanting increased nitrogen into sidewall 39 of STI plug 29a, resist layer 35 is removed. The extent of addition of [N] into the sidewalls is not critical so long as it is sufficient to resist erosion due to wet chemical etch attack. A region of [N] with a thickness of

50Å to 100Å into the sidewalls would be sufficient for this purpose.

It will be understood from the foregoing description that various modifications and changes may be made in the preferred embodiment of the present invention without departing from its true spirit. It is intended that this description is for purposes of illustration only and should not be construed in a limiting sense. The scope of this invention should be limited only by the language of the following claims.

Claims

What is claimed is:

- 1 1. A method of forming an isolation structure for a semiconductor device, comprising the  
2 steps of:  
3 forming a trench region (11) within a semiconductor substrate (3);  
4 forming an oxide liner within said trench region (11);  
5 nitriding said oxide liner to form an oxynitride liner (27) within said trench region (11);  
6 and  
7 directly filling said trench region (11) with an oxynitride material (29) formed from the  
8 deposition of a fill material including oxygen and nitrogen.
- 1 2. The method as set forth in Claim 1 wherein said step of filling said trench region (11)  
2 with an oxynitride material (29) comprises filling said trench region using a high density plasma  
3 oxide mixture including nitrogen.
- 1 3. The method as set forth in Claim 2 wherein the amount of said nitrogen in said plasma  
2 oxide mixture is increased during the filling of said trench (11) so that the nitrogen concentration  
3 in said oxynitride material is higher at the top of said trench region (11).
- 1 4. The method as set forth in Claim 3 wherein said plasma oxide mixture including  
2 nitrogen is formed from a mixture of  $\text{SiH}_4$  and  $\text{O}_2$  with a controlled amount of  $\text{NH}_3$  added  
3 thereto.
- 1 5. The method as set forth in Claim 4 wherein the proportion of  $\text{NH}_3$  to  $\text{O}_2$  in said plasma  
2 is in the range of 0.1 to 10.
- 1 6. The method as set forth in Claim 5 wherein said step of nitriding said oxide liner to form  
2 an oxynitride liner (27) includes nitriding by annealing in a nitrogen containing ambient.

1 7. The method as set forth in Claim 5 wherein said step of nitriding said oxide liner to form  
2 an oxynitride liner (27) includes nitriding by plasma nitridation.

1 8. The method as set forth in Claim 5 wherein said step of nitriding said oxide liner to form  
2 an oxynitride liner (27) includes nitriding said oxide liner with a greater concentration of  
3 nitrogen at the top portion of the sidewall of said trench.

1 9. The method as set forth in Claim 8 wherein said step of nitriding said oxide liner with a  
2 greater concentration of nitrogen at the top of the said sidewall of said trench includes nitriding  
3 by ion implant.

1 10. The method as set forth in Claim 9 further comprising the steps of etching said  
2 oxynitride material (29) to form an oxynitride trench plug (29a), the top surface of which  
3 extends above the surface of said substrate (3), and nitriding the top surface of said oxynitride  
4 trench plug (29a).

1 11. The method as set forth in Claim 10 wherein at least the sidewall portions of said  
2 oxynitride trench plug (29a) extending above the said surface of said substrate (3) are nitrided.

1 12. The method as set forth in Claim 11 wherein said sidewall portions are nitrided by ion  
2 implant.

1 13. A semiconductor device trench isolation structure, comprising a substrate (3) having a  
2 trench region filled with an oxynitride material to form an oxynitride trench plug (29a) with the  
3 nitrogen concentration of said oxynitride material being greater at the top portion of said trench  
4 plug (29a) than at the bottom portion of said trench plug (29a).

1 14. The trench isolation structure as set forth in Claim 13 wherein the nitrogen concentration  
2 of said oxynitride material is graded so that the nitrogen concentration increases from the bottom

1 of said trench plug (29a) to the top of said trench plug (29a).




2 15. The trench isolation structure as set forth in Claim 13 wherein said trench region  
3 includes an oxynitride liner (27) lining the walls of said trench region with the sidewalls of said  
4 oxynitride liner (27) at the top portion of said trench region having a nitrogen concentration  
5 greater than the nitrogen concentration in the sidewalls of said oxynitride liner at the lower  
6 portion of said trench region.

1 16. The trench isolation structure as set forth in Claim 15 wherein the nitrogen concentration  
2 within the top 50Å of the sidewalls of said oxynitride trench plug (29a) is higher than the  
3 nitrogen concentration below the top 50Å of the sidewalls of said oxynitride trench plug (29a).


1 17. The trench isolation structure as set forth in Claim 16 wherein said oxynitride trench  
2 plug (29a) extends above the surface of said substrate (3) and wherein at least the portion of said  
3 trench plug (29a) extending above the surface of said substrate (3) has a nitrogen concentration  
4 greater than the portion of said trench plug (29a) extending below the surface of said substrate  
5 (3).

1 18. The trench isolation structure as set forth in Claim 16 wherein said oxynitride trench  
2 plug (29a) extends above the surface of said substrate (3) and wherein the sidewall portions of  
3 said trench plug (29a) extending above the surface of said substrate (3) have a nitrogen  
4 concentration greater than the interior portions of said trench plug (29a).




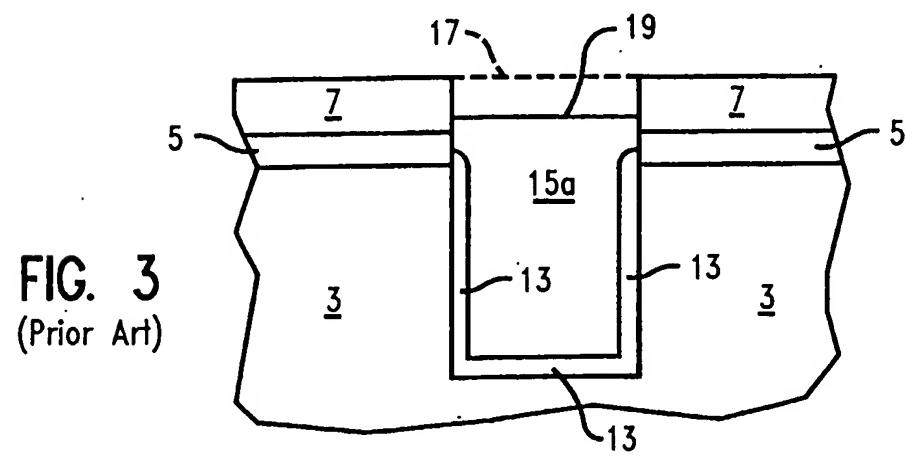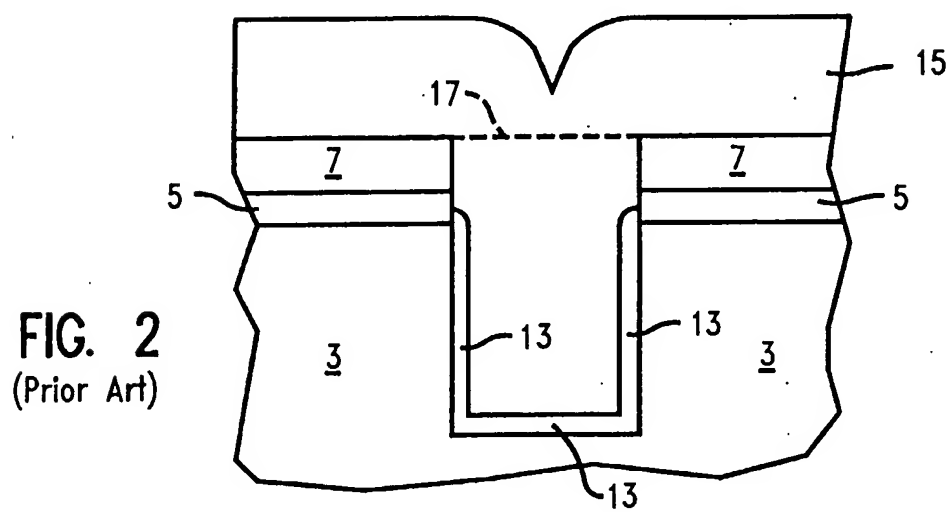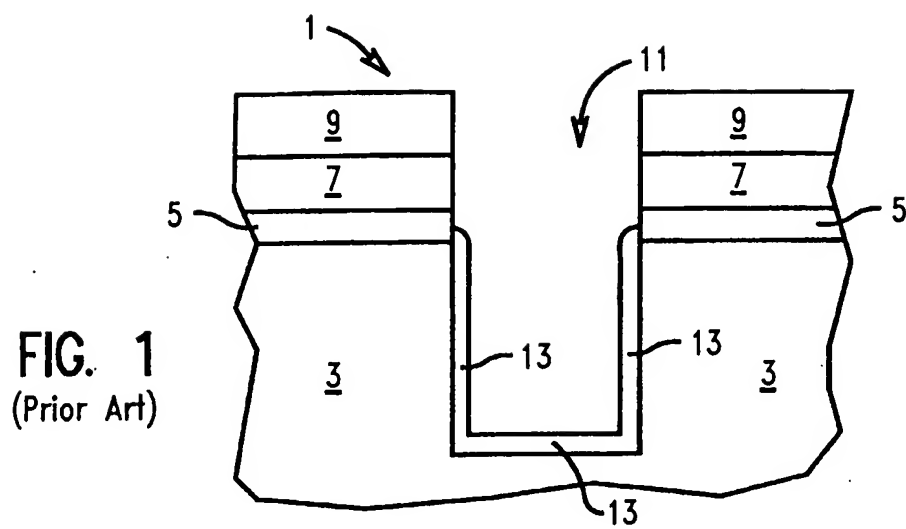

**FIG. 4**  
(Prior Art)

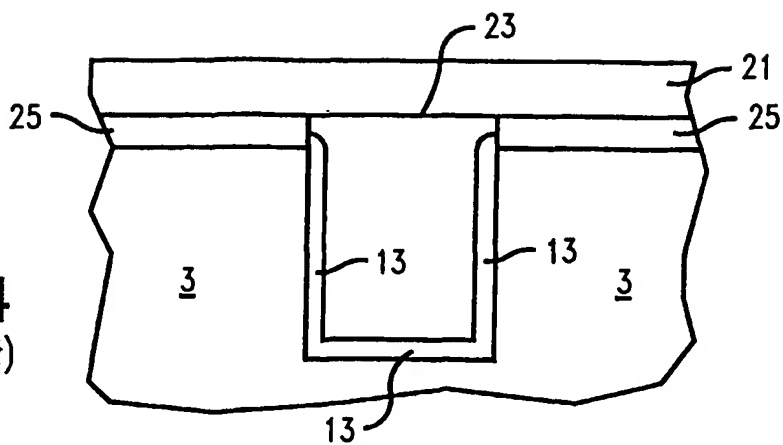

**FIG. 5**

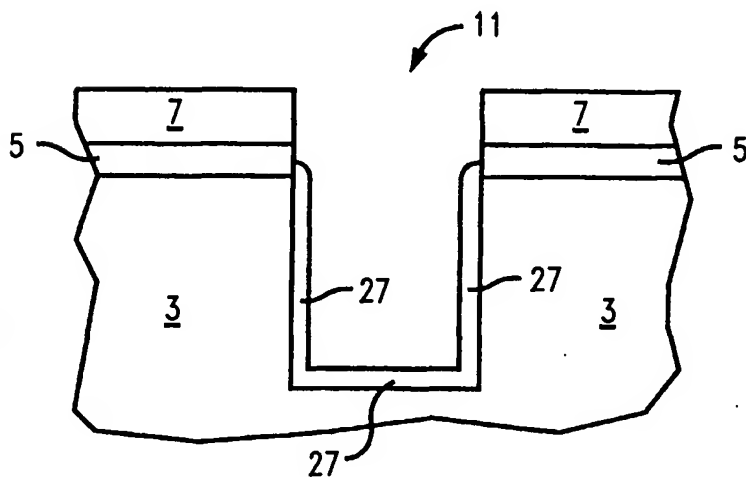

**FIG. 6**

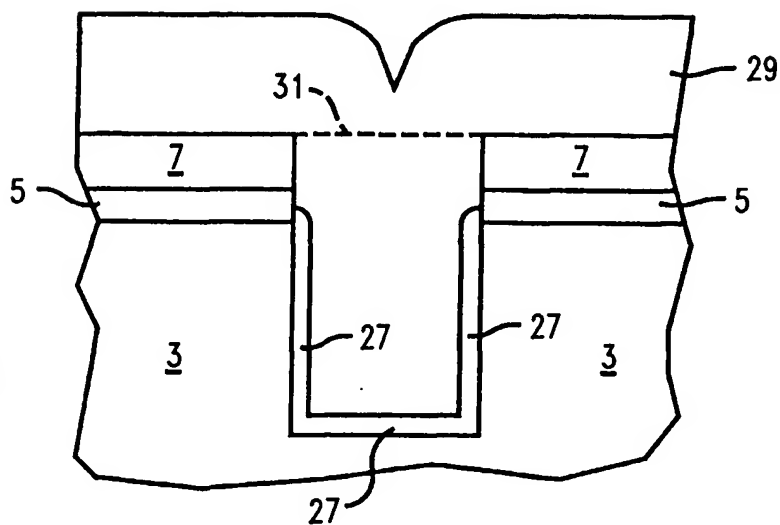


FIG. 7


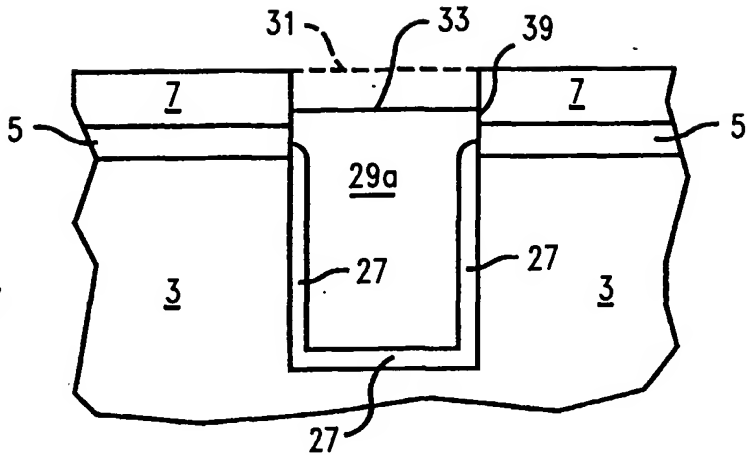


FIG. 8

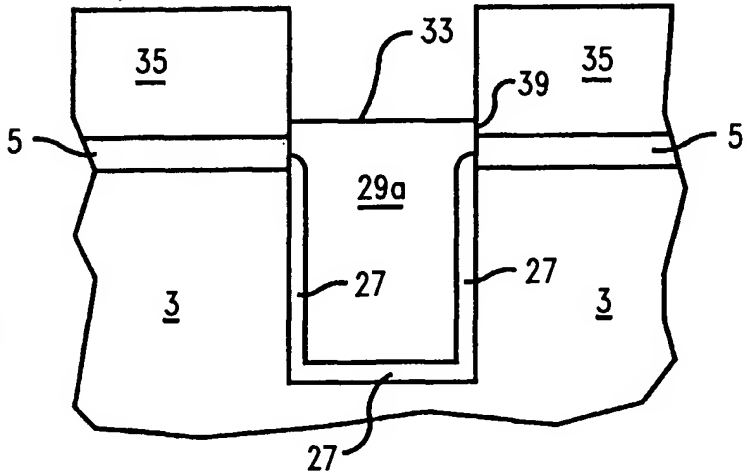

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/16004

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>												
IPC(7) : H01L 21/762												
US CL : 438/424, 435; 257/506, 510												
According to International Patent Classification (IPC) or to both national classification and IPC												
<b>B. FIELDS SEARCHED</b>												
Minimum documentation searched (classification system followed by classification symbols)												
U.S. : 438/218, 221, 424, 435; 257/506, 510												
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched												
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Please See Continuation Sheet												
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>												
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.										
X	JP 07-307382 (Kataoka) 21 November 1995 (21.11.1995) Figs. 4a-d; paragraphs [0030]-[0041].	1										
---		-----										
Y		2										
Y	US, 6,218,720 B1 (Gardner et al) 17 April 2001 (17.04.2001), column 8, lines 15-64.	1,2										
Y,P	US, 6,258,676 B1 (Lee et al) 10 July 2001 (10.07.2001), column 5, lines 7-19.	1,2										
Y	JP 2001-085511 (Fukazawa et al) 30 March 2001 (30.03.2001), paragraphs: [0033]-[0036]	1,2										
A	K. Shiozawa et al., Expansion of Effective Channel Width for MOSFETs Defined by Novel T-Shaped Shallow Trench Isolation Fabricated with SiON Spacers and Liners, Electronics Letters, 11 May 2000 (11.05.2000), Vol. 36, No. 10, pp. 910-912.	1-18										
A	JP 07-176606 (Maeda et al) 14 July 1995 (14.07.1995).	1-18										
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.												
* Special categories of cited documents: <table border="0"> <tr> <td>"A" document defining the general state of the art which is not considered to be of particular relevance</td> <td>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"E" earlier application or patent published on or after the international filing date</td> <td>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"L" documents which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"O" document referring to an oral disclosure, use, exhibition or other means</td> <td>"&amp;" document member of the same patent family</td> </tr> <tr> <td>"P" document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L" documents which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family	"P" document published prior to the international filing date but later than the priority date claimed	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention											
"E" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone											
"L" documents which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art											
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family											
"P" document published prior to the international filing date but later than the priority date claimed												
Date of the actual completion of the international search		Date of mailing of the international search report										
03 October 2002 (03.10.2002)		05 NOV 2002										
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703)305-3230		Authorized officer Anh D. Mai <i>Macaleg</i> Telephone No. (703) 308-0956										

**INTERNATIONAL SEARCH REPORT**

PCT/US02/16004

**Continuation of B. FIELDS SEARCHED Item 3:**

**EAST:** U.S.; U.S. PUB; EPO; JPO and Derwent:

**serch Terms:** trench isolation, liner, oxynitride or SiON, HDP, SiH<sub>4</sub>, N<sub>2</sub>O or NH<sub>3</sub>.

**IEEE Explore:** trench isolation and oxynitride or SiON.